



**KOLEJ YAYASAN PELAJARAN JOHOR
ONLINE FINAL EXAMINATION**

COURSE NAME : CONTROL SYSTEMS
COURSE CODE : DKE 2163
EXAMINATION : DECEMBER 2021
DURATION : 2 HOURS 30 MINUTES

**INSTRUCTION TO CANDIDATES/
ARAHAH KEPADA CALON**

1. This examination paper consists of **FOUR (4)** questions. /
*Kertas soalan ini mengandungi **EMPAT (4)** soalan.*
2. Students are allowed to refer to resources such as lecture notes, books, internet or any other relevant resources. /
Pelajar dibenarkan merujuk kepada sumber seperti nota kuliah, buku, internet atau mana-mana sumber yang berkaitan.
3. Answer ALL questions in the answer sheet which is A4 size paper (or other paper with the consent of the relevant lecturer). /
Jawab SEMUA soalan di dalam kertas jawapan iaitu kertas bersaiz A4 (atau lain-lain kertas dengan persetujuan pensyarah berkaitan).
4. Write your details as follows in the upper left corner for each answer sheet: /
Tulis butiran anda seperti mana berikut di penjuru atas kiri bagi setiap kertas jawapan:
 - i. Student Full Name. / *Nama Penuh Pelajar.*
 - ii. Identification Card (I/C) No. / *No. Kad Pengenalan.*
 - iii. Class Section. / *Seksyen Kelas.*
 - iv. Course Code. / *Kod Kursus.*
 - v. Course Name. / *Nama Kursus.*
 - vi. Lecturer Name. / *Nama Pensyarah.*
5. Each answer sheet must have a page number written at the bottom right corner. /
Setiap helai kertas jawapan mesti ditulis nombor muka surat di penjuru bawah kanan.
6. Answer should be handwritten, neat and clear. /
Jawapan hendaklah ditulis tangan, kemas dan jelas.

**DO NOT TURN THIS PAGE UNTIL YOU ARE TOLD TO DO SO /
JANGAN BUKA KERTAS SOALAN INI SEHINGGA DIBERITAHU**

This examination paper consists of **5** printed pages including front page
*Kertas soalan ini mengandungi **5** halaman bercetak termasuk muka hadapan*

This examination paper consists of **FOUR (4)** questions. Answer **ALL** the questions in an answer sheet.

*Kertas soalan ini mengandungi **EMPAT (4)** soalan. Jawab **SEMUA** soalan dalam kertas jawapan.*

QUESTION 1/ SOALAN 1

- (a) Describe the use of **four(4)** test waveforms used in control systems and draw the respective waveforms.

*Terangkan kegunaan **empat(4)** gelombang ujian yang digunakan pada sistem kawalan dan lukis gelombang tersebut.*

(8 marks / 8 markah)

- (b) Fill in the blanks in the **Table 1** below of the differences between closed-loop and open-loop systems.

*Isikan tempat kosong pada **Jadual 1** di bawah berkenaan perbezaan sistem gelung tertutup dan gelung terbuka.*

Closed-loop system <i>Sistem gelung tertutup</i>	Open-loop system <i>Sistem gelung terbuka</i>
	Does not have the feedback path. <i>Tidak mempunyai laluan suapbalik.</i>
Output response: greater accuracy. <i>Respon keluaran : ketepatan yang tinggi.</i>	
	Sensitive to noise, disturbances and changes in the environment. <i>Sensitif terhadap kebisingan, gangguan dan perubahan persekitaran.</i>
The system can compare the output response with the input and make a correction if there is any difference. <i>Sistem mampu membandingkan respon keluaran dengan masukan dan membuat pembetulan jika terdapat perbezaan.</i>	
	Simple and inexpensive. <i>Mudah dan murah.</i>

Table 1 / Jadual 1

(10 marks / 10 markah)

QUESTION 2/ SOALAN 2

Show the transfer function, $X_2(s)/F(s)$, for the translational mechanical system of **Figure 2**.

Tunjukkan rangkap pindah, $X_2(s)/F(s)$, bagi sistem mekanikal penterjemah pada **Rajah 2**.

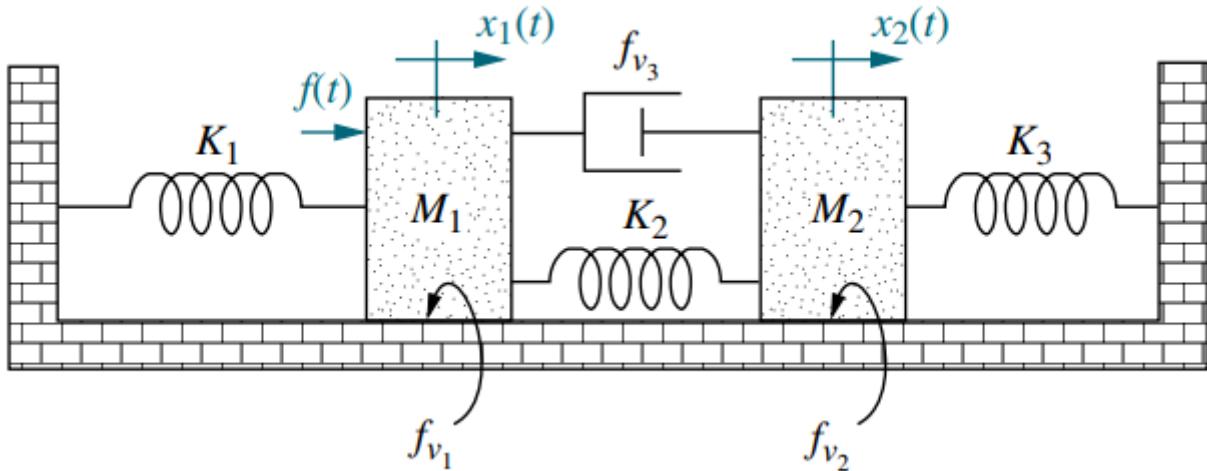


Figure 2 / Rajah 2

(12 marks / 12 markah)

QUESTION 3/ SOALAN 3

- (a) Describe **three(3)** transient response specifications of First Order System with their respective formula.

Terangkan **tiga(3)** spesifikasi tindak balas sementara pada Sistem Susunan Pertama bersama formula mereka.

(9 marks / 9 markah)

- (b) Reduce the system in **Figure 3** to a single transfer function.

Mudahkan sistem dalam **Rajah 3** kepada rangkap pindah tunggal.

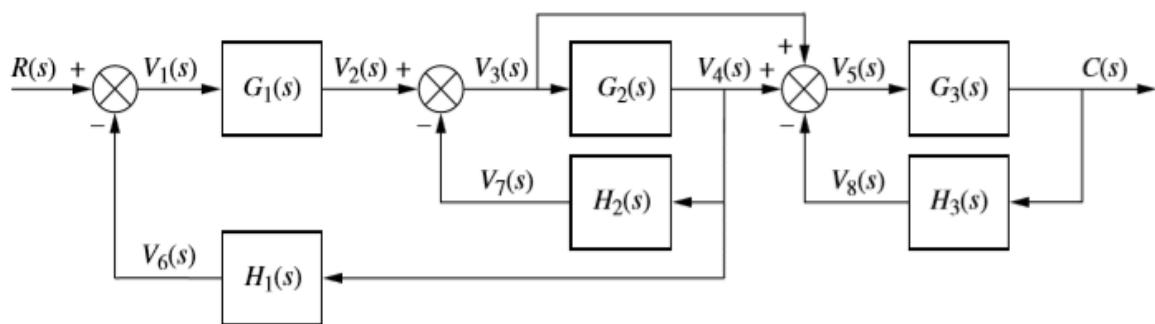


Figure 3 / Rajah 3

(8 marks / 8 markah)

- (c) Use Routh-Hurwitz stability criterion to determine how many roots with positive real parts for the equation.

Gunakan kriteria kestabilan Routh-Hurwitz untuk menentukan jumlah punca untuk bahagian sebenar positif untuk persamaan ini.

$$s^5 + 10s^4 + 30s^3 + 80s^2 + 344s + 480 = 0$$

(10 marks / 10 markah)

QUESTION 4/ SOALAN 4

- (a) Given the transfer function, $G(s)$ for the control system shown in **Figure 4(a)** below. Referring to **Figure 4(b)**, answer the questions that follows:

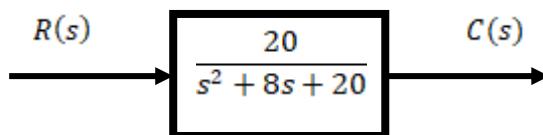


Figure 4(a) / Rajah 4(a)

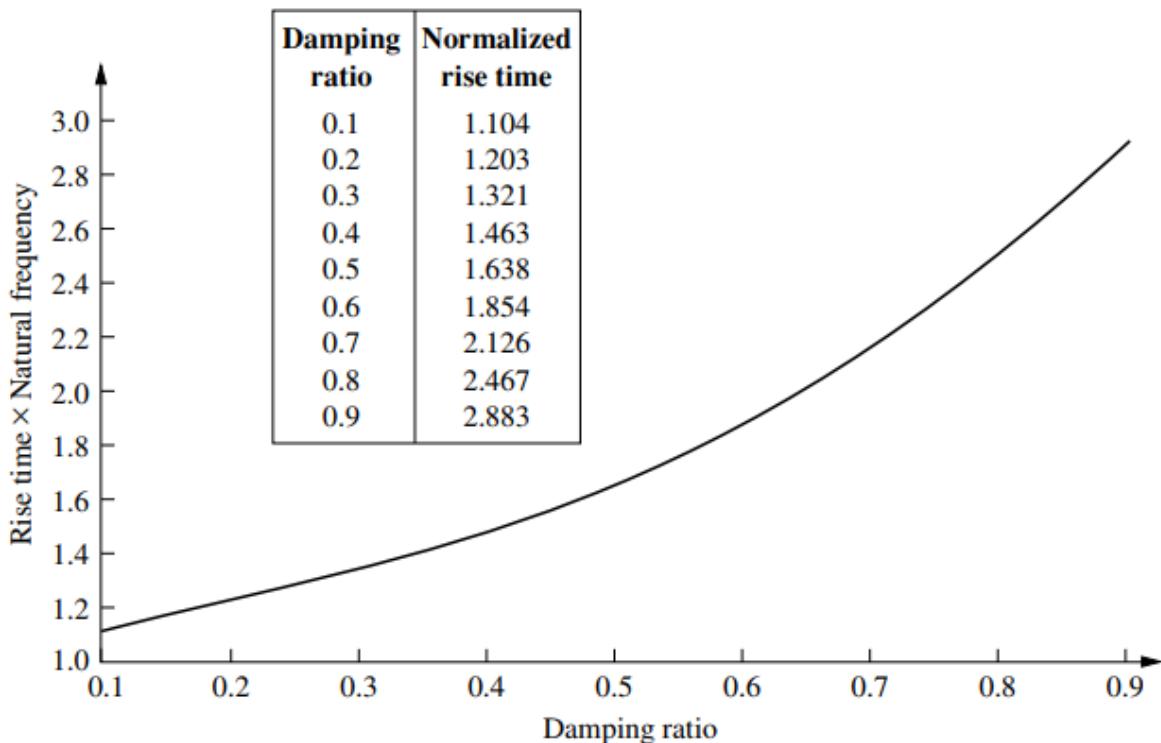


Figure 4(b) / Rajah 4(b)

- Shows the natural frequency, ω_n and damping ratio, ξ .
- Determine peak time, T_p , percent overshoot, %OS, settling time, T_s , and rise time, T_r .
- Characterize the nature of the response.
- Draw the response.

(18 marks /18 markah)

Diberi rangkap pindah, $G(s)$ untuk sistem kawalan ditunjukkan dalam **Rajah 4(a)** dibawah. Merujuk pada **Rajah 4(b)**, sila jawab soalan berikut:

- Tunjukkan frekuensi tabii, ω_n dan nisbah redaman, ξ .
 - Tentukan masa puncak, T_p , peratus lajakan, %OS, masa selesai, T_s , dan masa menaik, T_r .
 - Cirikan sifat tindak balas.
 - Lukis tindak balas.
- (b) Solve the transfer function, $C(s)/R(s)$, for the signal-flow graph in **Figure 5**.
Selesaikan Rangkap, $C(s)/R(s)$, untuk graf isyarat –laluan pada **Rajah 5**.

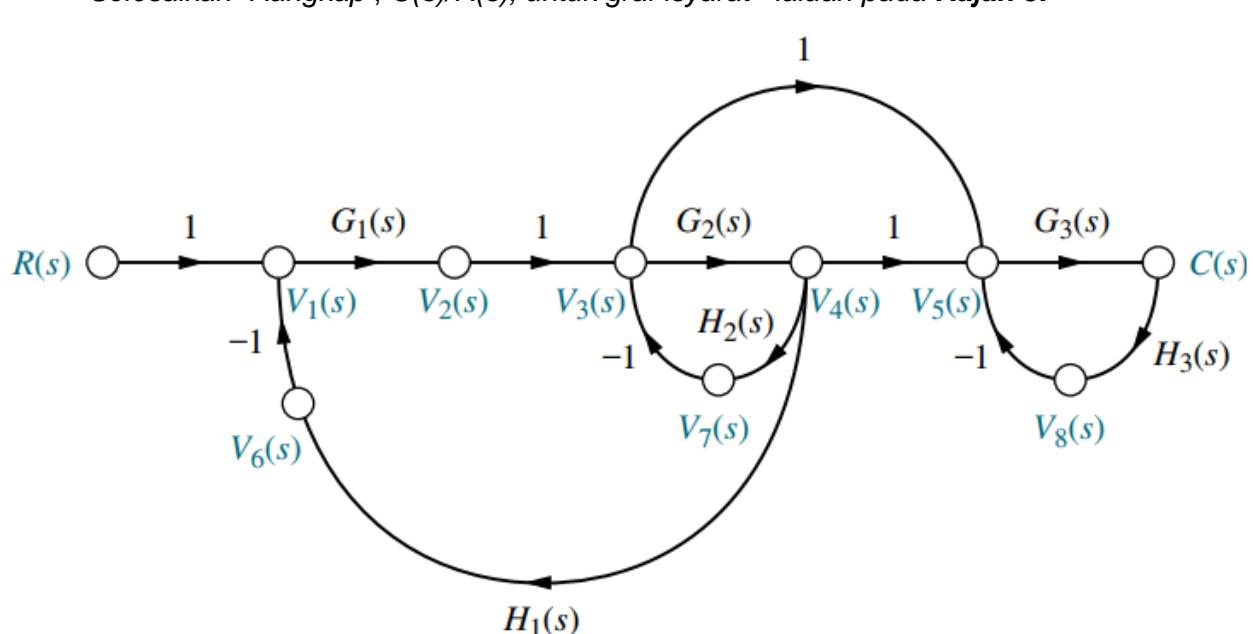


Figure 5 / Rajah 5

(25 marks /25 markah)

[100 MARKS/ 100 MARKAH]

END OF QUESTION PAPER/ KERTAS SOALAN TAMAT